

LOW NOISE POWER AMPLIFIER

With Controller

Applications

- Wireless Infrastructure
- RF Microwave
- Military and Aerospace
- Test Instruments
- Fiver Optics


Features

- High stability
- 50 Ohm input and output match
- Reliable Performance
- Internally regulated
- Available as RoHS compliant

Electrical Specifications

Frequency Ghz	Noise Figure dB	Gain dB	Input/Output VSWR Max
2.65 – 2.95	+8	0.2	1.3:1
Gain Flatness (+/-) dB	Output Power (With input power +8dBm) Dbm	Voltage VDC	Current mA
±0.50	+31 ±0.3dB	5	450

Outline Drawing

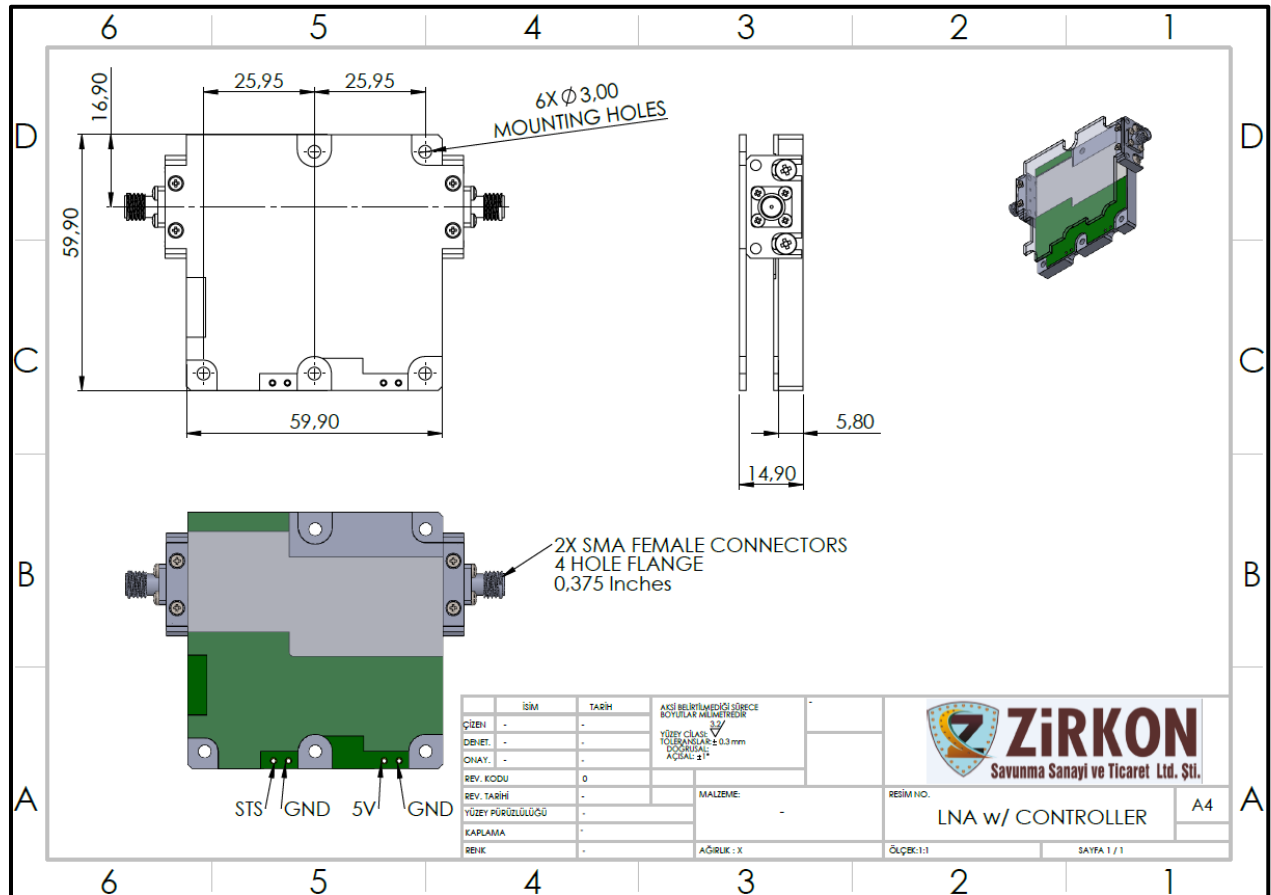

Tel: +90 312 234 33 77 / +90 530 466 23 23

Fax: +90 312 234 33 78

Adress: Baglica District 1120, Street No: 4/A 06790 Etimesgut ANKARA TURKEY